

HSM V-Press 610



HSM V-Press 610 vertical baling press

The HSM V-Press 610 reduces the volume of cardboard or foils in an economical way.

Technical data

| | | | |
|--|------------------------|--|---|
| Order number: | 6110164 | Loading aperture width x height: | 800 x 495 mm |
| EAN | 4026631074278 | Bale length x Bale width x Bale height: | 800 x 600 x 600 mm |
| Pressing power: | 120 kN | Bale weight: | 100 kg |
| Specific pressing power: | 25 N/cm ² | Width x Depth x Height: | 1198 x 823 x 1986 mm |
| Driving power: | 3 kW | Weight: | 540 kg |
| Voltage / Frequency: | 400 V / 50 Hz | Related product line: | V-Press |
| Cycle time when idling vacío: | 22 s | Type of consumables: | Strapping tape |
| Volume throughput in idle operation (theor.): | 6,25 m ³ /h | Press material: | Plastic film, Mixed paper, Cardboard, Punch waste/residue |
| Loading height: | 655 mm | | |

Product information



Special retaining claws optimize the compression of the pressing material.



To fill the press, the upper half of the doors is swung to the right



Hand wheel door lock - Easy to handle thanks to counter-rotating thread for quick opening and closing

HSM®




Compresses cardboard and film

Suitable for cardboard as well as film.



Automatic start

Automatic start of the pressing process after closing the door.

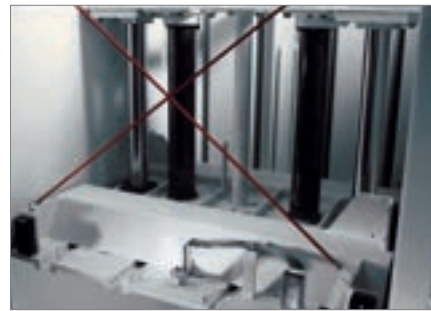


Optimized pressing

Massive press ram and extremely robust press plate guidance.



Graphic-capable display

Convenient membrane keypad with text display, which shows the current status of the machine.

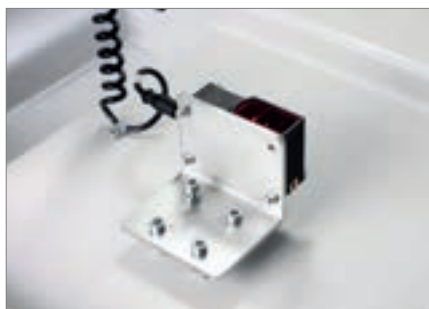


HSM TCS

HSM TCS (Torsion Control System) for monitoring press ram movement.



Strapping

Manual bale strapping with continuous polyester tape.



www.tuev-sued.de/ps-zert



HSM V-Press 605,
610



HSM V-Press 818,
820, 825

www.hsm.eu

