

HSM V-Press 820



HSM V-Press 820 plus vertical baling press

Thanks to its powerful motor, its ergonomic design and its sophisticated and innovative technology, the HSM V-Press 820 combines all of the advantages of a baling press into one machine.

Technical data

Order number:	6043414	Bale length x Bale width x Bale height:	1200 x 1000 x 780 mm
EAN	4026631080552	Bale weight:	250 kg
Pressing power:	178 kN	Method of loading:	manual
Specific pressing power:	19,23 N/cm ²	Width x Depth x Height:	1700 x 1075 x 2499 mm
Driving power:	4 kW	Weight:	1300 kg
Voltage / Frequency:	400 V / 50 Hz	Related product line:	V-Press
Cycle time when idling vacío:	23 s	Type of consumables:	Strapping tape
Volume throughput in idle operation (theor.):	6,25 m ³ /h	Press material:	Plastic film, Mixed paper, Cardboard, Punch waste/residue
Loading height:	928 mm		
Loading aperture width x height:	1195 x 558 mm		

Product information



Quick and easy installation due to crossed cylinders



To fill the press, the upper half of the doors is folded down



Hand wheel door lock - Easy to handle thanks to counter-rotating thread for quick opening and closing

HSM®




Compresses cardboard and film

Suitable for cardboard as well as film.



Automatic start

Automatic start of the pressing process after closing the door.

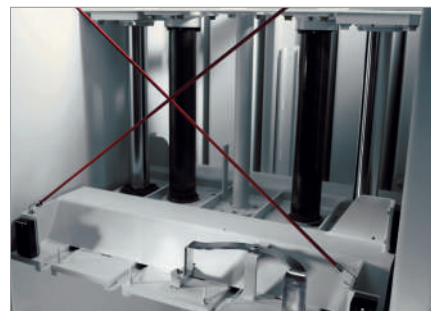

Optimized pressing

Massive press ram and extremely robust press plate guidance.



Graphic-capable display

Convenient membrane keypad with text display, which shows the current status of the machine.




HSM TCS

HSM TCS (Torsion Control System) for monitoring press ram movement.



Strapping

Manual bale strapping with continuous polyester tape.



www.tuev-sued.de/ps-zert



HSM V-Press 605,
610



HSM V-Press 818,
820, 825

www.hsm.eu

